

PRIME-HEAT Radiators

Cost Effective Solution For All Heating Systems



Maximum Heat Outputs & Space Saving Design



- Suitable for use with Boilers, Heat Pumps and Solar Panels.
- 500/600mm High Range with Double Convectors.
- Sleek Design with 70mm Slim Body.
- Decorative Horizontal Design Front Panel.
- Robust Unit with Extra Steel and Weight.
- Complete with Hanging Brackets and Accessory Kit.
- Installation Ready. No added joints required.
- Retains heat longer to create “Stove Effect”.
- Corrosion resistant.







100% Test pressure - 13 bar	Colour - RAL 9016
Max. Working pressure - 10 bar	Connection - 4 DIN G $\frac{1}{2}$ "
Max. Water temperature - 100C	EN442 Certified

PRIME-HEAT Radiators

500

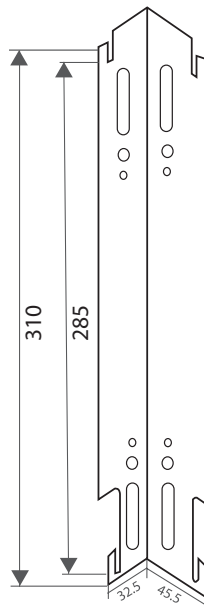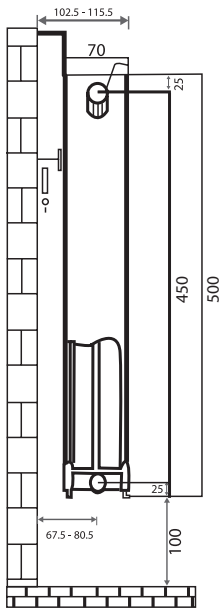

600

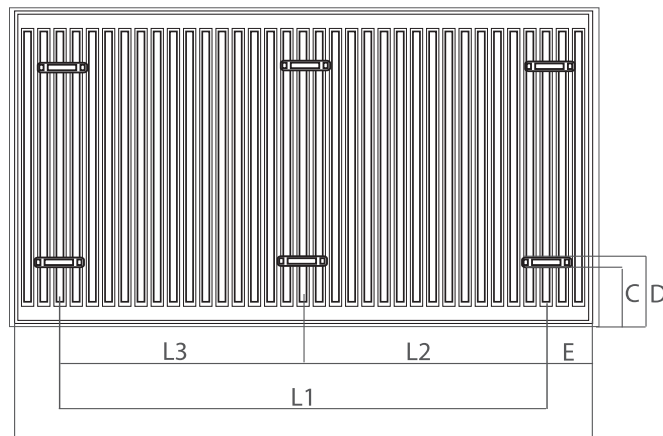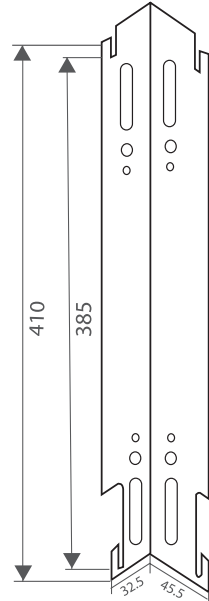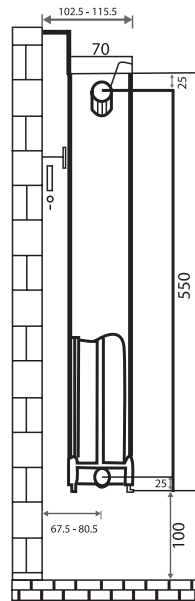

PRIME-HEAT Radiators Dimensions

L	L1	L2	L3	Brackets	C	D	E
400	200	-	-	2	96	120	110
500	300	-	-	2	96	120	110
600	400	-	-	2	96	120	110
700	500	-	-	2	96	120	110
800	600	-	-	2	96	120	110
900	700	-	-	2	96	120	110
1000	800	-	-	2	96	120	110
1100	900	-	-	2	96	120	110
1200	1000	-	-	2	96	120	110
1400	1200	-	-	2	96	120	110
1600	1400	-	-	2	96	120	110
1800	1600	800	800	3	96	120	110
2000	1800	900	900	3	96	120	110

PRIME-HEAT Radiators

Height	Weight	Water Content
	Kg/M	Lt/M
600	32.55	5.75
500	28.22	4.98




PRIME-HEAT Radiators

Prime-Heat Radiator Output Chart

500mm Height							
Length	Part Number	DT62		DT50		DT22.5	
		Watts	BTU	Watts	BTU	Watts	BTU
400	PR500X400	636	2171	482	1645	172	586
500	PR500X500	795	2713	603	2056	215	732
600	PR500X600	954	3254	722	2464	257	877
700	PR500X700	1112	3795	843	2875	300	1024
800	PR500X800	1272	4340	963	3287	343	1170
900	PR500X900	1431	4881	1084	3698	386	1316
1000	PR500X1000	1589	5422	1204	4109	429	1463
1100	PR500X1100	1749	5967	1325	4520	472	1609
1200	PR500X1200	1907	6508	1445	4931	515	1756
1400	PR500X1400	2226	7594	1686	5754	600	2048
1600	PR500X1600	2543	8676	1926	6573	686	2340
1800	PR500X1800	2861	9762	2168	7396	772	2633
2000	PR500X2000	3179	10848	2409	8218	857	2926
600mm Height							
Length	Part Number	DT62		DT50		DT22.5	
		Watts	BTU	Watts	BTU	Watts	BTU
400	PR600X400	734	2504	556	1897	198	675
500	PR600X500	917	3129	695	2371	247	844
600	PR600X600	1100	3753	833	2842	297	1012
700	PR600X700	1283	4378	972	3316	346	1181
800	PR600X800	1467	5005	1111	3791	396	1350
900	PR600X900	1650	5630	1250	4265	445	1518
1000	PR600X1000	1833	6254	1389	4739	494	1687
1100	PR600X1100	2017	6882	1528	5214	544	1856
1200	PR600X1200	2200	7506	1667	5688	593	2025
1400	PR600X1400	2567	8759	1945	6636	692	2363
1600	PR600X1600	2933	10007	2222	7581	791	2699
1800	PR600X1800	3300	11260	2500	8530	890	3037
2000	PR600X2000	3667	12512	2778	9479	989	3374



PRIME-HEAT

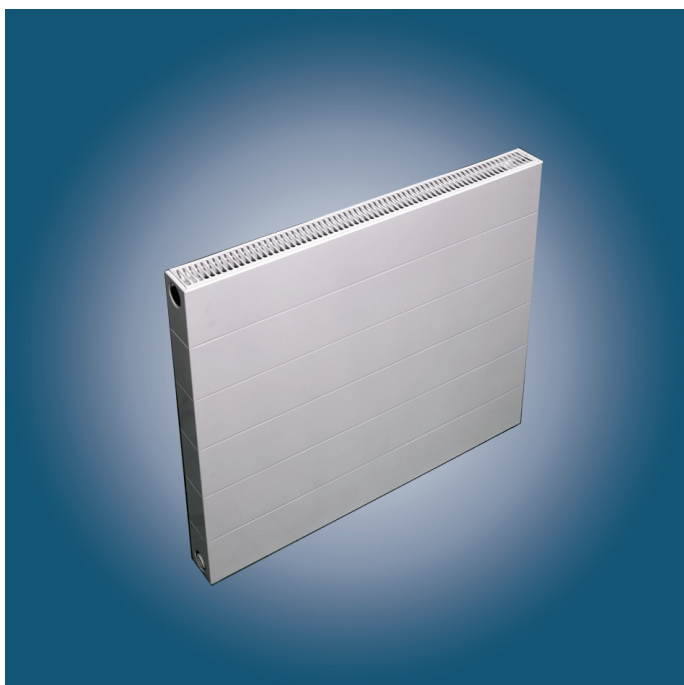

Thermtek Limited
Carrigaline Industrial Park,
Carrigaline,
Co. Cork.

Telephone: +353 (21) 4377858
Fax: +353 (21) 4377864
Email: info@thermtek.ie
www.thermtek.ie